

Interoffice

National Radio Astronomy Observatory

Charlottesville, Virginia

January 20, 1982

To: VLBA Working Group

VLB ARRAY MEMO No. 56

From: R. P. Escoffier

Subject: VLBA Recording System - Draft #2

Attached is a second draft of the recorder section for the VLBA Proposal.

The major differences from the first draft include a more accurate cost estimate, especially of the proposed automatic cassette changer, and an appendix section giving alternatives and comparisons of various recorders.

Dave Weber at the VLA has made a preliminary design of an automatic cassette changer which has yielded a better cost estimate than I included in my first draft. Figure 1, referred to in this draft, illustrates Dave's design.

In the comparison section, I have proposed 24-hour-a-day manning of the antennas to support tape changes for the high density MK III recorders. This may not be acceptable but it seems to me to be cheaper than buying multiple recorders to support 24-hour unattended operation (4 additional recorders at 14 antennas would cost \$2 million not including electronics, \$5 million for the X10 MK III).

Attachment

I. The Array Record System

The digital output of the I.F. samplers at each antenna must be stored for post observation shipment to the VLBA processor where correlation with data from all the antennas will take place. This storage will be on magnetic tape with wide band digital tape recorders required at each antenna for storage and similar units at the processor required for playback.

The maximum bit rate of 100M bps produced at each antenna and the need to observe for 24 hours a day sets the upper limit on the antenna record system data rate and storage capacity at 100M bps and 10^{13} bits/day. The need to record data at this high rate and in this volume with a minimum of operator intervention over 24 hours puts difficult requirements on the record system.

The two systems most investigated to meet the VLBA record system requirements are those systems already used in VLBI experiments, the MK II and MK III VLBI recorders.

The MK II system uses consumer type video cassette recorders (VCR's) modified to record digital data. These systems have proven reliability records and are inherently inexpensive.

The MK III system uses broad band instrumentation recorders that can take up to a 112M bps rate. This recorder is a 28-track machine which will require digital division of the four 25M bps bands into the 28 up to 4M bps recorder tracks.

Neither type recorder, however, is directly applicable to the VLBA. The MK II system suffers from low bandwidth (4M bps per recorder) while the MK III system will record only about 13 minutes of full bandwidth data on a 9200-ft. reel of 1 inch tape. Work at various institutions is proceeding, however, to improve both systems. A MK II recorder has been made to work at a data rate

of 12M bps and NRAO is investigating recording up to 16 or 20M bps on these recorders and a high density moving head system is under design for upgrading the recording volume per reel of the MK III recorder.

Of these two possible recorders, NRAO proposes to use the less expensive MK II recorder in building the VLBA, keeping in mind possible improvements in the MK III recorder before actual VLBA development begins.

At a data rate of 16M bps, each antenna will require seven recorders to keep up with the 100M bps data rate output of the samplers. Lower sample rates can be handled by dropping recorders off line or by increasing the bits per sample. Seven recorders will produce up to 42 four-hour tape cassettes per day per antenna. To reduce the bookkeeping required to keep this many tape cassettes straight and to reduce operator intervention to a minimum, NRAO proposes to develop, for the VLB Array, a rack based recorder system using 7 video cassette recorders plus one floating spare in an integrated rack assembly (see Figure 1). This rack will have a rack based automatic cassette changer plus a rack based cassette storage area, all under control of a central microprocessor. The tape storage area will be a dismountable bin which can be shipped, cassettes in place, to the correlator for processing. A similar rack based playback system at the processor will complement the antenna record system requiring only insertion of the cassette-loaded bin to process one day's worth of observations for a given antenna. Cassette changes, recorder operations, data synchronism, automatic spare recorder replacement for a defective unit, etc. will all be done under microprocessor control requiring a minimum of operator intervention.

The sampler outputs at any antenna will be recorded on the various tape recorders in 10,000 bit swatches with each swatch having its own time code and check sum encoded. By breaking the data into such swatching, the four I.F.

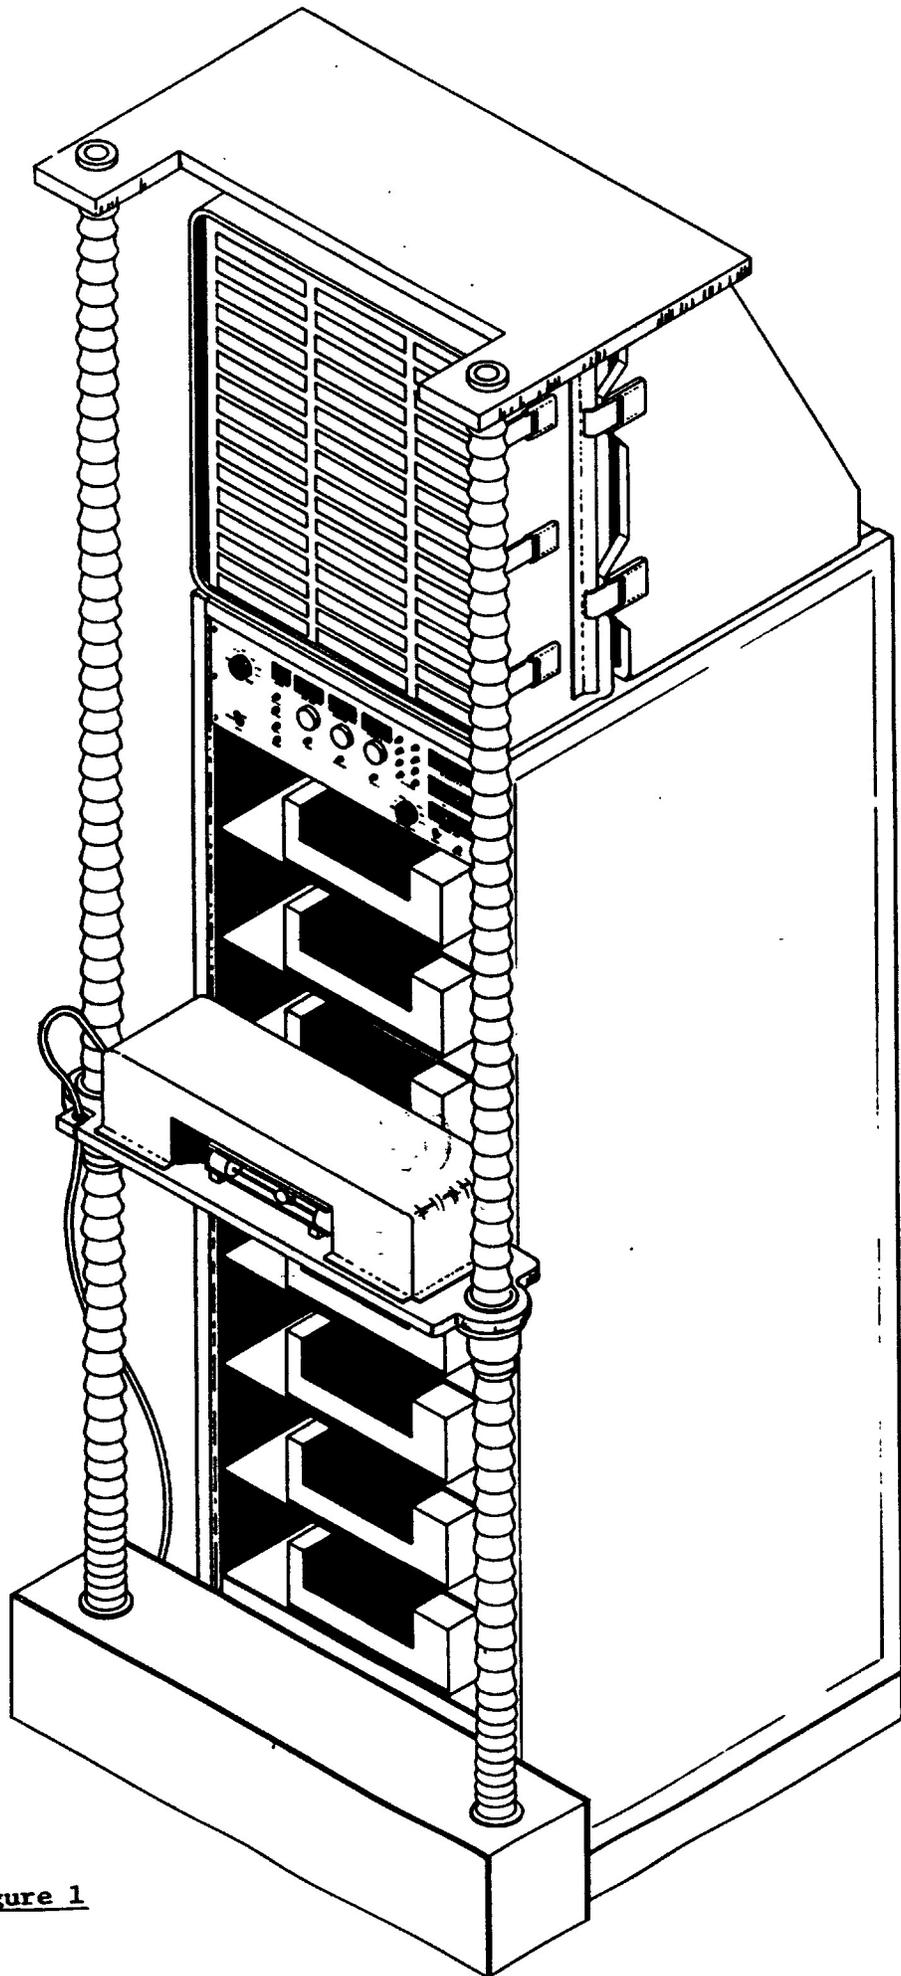


Figure 1

bands can be multiplexed between all 7 recorders. Thus, one-seventh of any I.F.'s data will be recorded on any given machine. Such an arrangement will require little digital circuitry to produce and to unscramble and will make fitting 4 bands into 7 recorders easy. Also, a failure of one recorder will then result in loss of 1/7 of each I.F.'s data rather than eliminating a large percentage on one I.F.'s data, yielding a more graceful recorder system failure sequence.

II. Playback System

The playback system will be, like the record system, based on consumer type video cassette records. A rack based playback station with 7 playback recorders plus one floating spare, a rack wide automatic cassette changer, and a central cassette storage bin will be required to service each antenna in the VLBA. The cassette bin, which holds one day's worth of observational results for one antenna, will be loaded into a playback rack where cassette shuttling, recorder operation, recorder time synchronism, etc., will be controlled by a central microprocessor. Since the order of the cassettes in the bins will have been under software control at each antenna, little bookkeeping will be required to keep the large number of cassettes produced by the VLBA in their proper order.

Although 112 recorders will be required at the processor to support a 14-antenna array, a more or less modular rack design as above should make the operational process at the correlator more reasonable. The inexpensive nature of the cassette recorders will also make sparing, both at the rack level and at the individual recorder level, economical.

The playback cassette units will be modified to play back at a speed 10 to 15% higher than the record speed, allowing some processing time edge over the observing time. This edge will help reduce the possibility of tape backlogs accumulating due to correlator usage delays and inefficiencies. Except for this

modification to the cassette recorder servo electronics, there will be no difference between an antenna recorder rack and a playback rack.

III. Recorder/Playback System Cost Estimate

A) Recorders

Each antenna will require one recorder rack plus one spare rack plus 10% spares of individual video cassette recorders and electronics. The table below estimates the recorder system cost per antenna:

18	video cassette recorders	\$ 15K
2	recorder racks with electronics	36K
	spare rack electronics	4K
		<hr/>
		\$ 55K

B) Playback

The correlator playback system will require 14 recorder racks, plus 2 spares plus 10% spares of individual recorders and electronics. Also included in this estimate is a 40-day supply of cassettes and cassette bins. The table below estimates the playback system cost:

140	video cassette recorders	\$112K
16	playback racks with electronics	288K
	spare rack electronics	24K
	spare recorder parts (heads, etc.)	24K
	40-day tape supply	253K
	40-day cassette bin supply	50K
		<hr/>
		\$751K

IV. Recorder/Playback System Alternatives and Comparisons

Various methods were considered in investigating how to get the remote antenna data to the processor for correlation for the VLBA. The most attractive method, real time transmission via satellite or land lines, is not practical at this time because of high cost and there seems only a slight chance at this time that direct transmission of VLBA data will ever be economically practical. However, this option, possibly using NRAO's own satellite, will be kept open.

Of recording mediums presently available or projected, only magnetic storage seems to be practical because of data storage density, storage medium cost, and storage medium reusability. Thus, most of the investigation for a VLBA data transmission system centered on magnetic tape recorders.

Tape recorders studied include wide band instrumentation recorders (specifically the MK III recorder), modified consumer type video recorders (specifically the MK II recorder), analog and digital television recorders, and projected high density digital recorders.

The television recorders suffer at present from high cost, lack of specifications (for digital TV), and the universality of 90 minute reel/cassette record times.

The array construction and operational costs of 4 possible remaining systems are summarized in Table I. These four record systems include:

- 1) The Ampex AVRX wide band digital recorder.
- 2) A MK III instrumentation recorder using movable heads to yield a 10-times increase in tape bit density (i.e., 280 tracks across the 1" tape).
- 3) A MK III instrumentation recorder using movable heads to yield a 20-times increase in tape bit density.
- 4) Multiple consumer type video cassette recorders (VCR) modified to record 16 mbs.

It should be noted that none of these possible record systems have been demonstrated as yet although the Ampex AVRX recorder has been demonstrated in a breadboard stage.

The chart is based on the following:

- 1) Hardware is assumed for 14 antennas with full recorder redundancy at each antenna and two spare recorders at the processor.
- 2) Operational cost is based on the operation of 10 antennas assuming that this will be the most common mode of operation.
- 3) Automatic cassette changers for the AVRX and VCR recorders are assumed.
- 4) The instrumentation recorders will require operators to change tapes every 2 to 4 hours since this seems more economical than having multiple recorders to allow 24-hour unattended operation.

	<u>Ampex AVRX</u>	<u>Moving Head MK III (10X)</u>	<u>Moving Head MK III (20X)</u>	<u>16M Bit VCR</u>
Recorder and electronics cost array (including spares)	\$5,410 k	\$2,360 k	\$2,360 k	\$1,210 k
40-day tape supply	\$1,300 k	\$ 743 k	\$ 380 k	\$ 253 k
40-day shipping container supply	\$ 50 k	\$ 40 k	\$ 20 k	\$ 50 k
TOTAL CONST. COST	\$6,760 k	\$3,143 k	\$2,760 k	\$1,513 k
Maintenance cost/yr.	\$2,200 k	\$ 355 k	\$ 472 k	\$ 158 k
Tape cost/yr.	\$ 23 k	\$ 270 k	\$ 139 k	\$ 15 k
Tape shipping cost/yr.	\$ 70 k	\$ 193 k	\$ 98 k	\$ 35 k
TOTAL OPERATING COST	\$2,293 k	\$ 818 k	\$ 709 k	\$ 208 k
Operator time/yr. (in man years)	2.7	30	30	2.7
Technical time/yr. (in man years)	0.1	0.1	0.1	1.5
TOTAL OPERATING MANPOWER (in man years)	2.8	30	30	4.2